

E-LITE 2.4 GHz

300 Mbps Wireless Broadband System 2.412-2.462 GHz

OVERVIEW

The ENCOM E-LITE 2.4 GHz unit represents an industry first low cost solution for enterprises and municipalities. Built for high data throughput and backbone applications in mind, the ENCOM E-LITE 2.4 GHz Solution is ideal for Wireless City projects and critical high-speed communications.

PERFORMANCE & SCALABILITY

ENCOM's E-LITE Solutions draw on all the strenghts of the COMMPAK and Energy solutions to provide standard-setting data rates, enhanced security and the dependability that ENCOM is known for at an affordable price.

ENCOM's E-LITE Solutions are fully compatible with all ENCOM Energy, COMMPAKBB and other manufacturers of 802.11 a/n compliant devices, offering you the flexibility to quickly and easily deploy a fast and efficient wireless ecosystem. By adhering to IEEE 802.11 standards and offering feautures such as Dynamic Frequency Selection, Traffic Prioritization and OFDM technology, the E-LITE 2.4 GHz Broadband Solution is highly resilient to RF interference while providing best-in-class transmission data rates and enhanced security features such as WPA, WPA2, TKIP, AES, MAC and RADIUS authentication.




STRATOS I/O Software

ENCOM STRATOS I/O SOFTWARE

ENCOM STRATOS+ has now evolved to become STRATOS I/O. Now with additional I/O functions, you can access your ENCOM I/O devices from any broadband or fiber network with its powerful and simple interface for rapid wireless network deployment.

STRATOS I/O software makes setting up and configuring your wireless network a breeze. With profile based configurations, built-in diagnostic and alignment tools as well as network mapping and robust security features STRATOS I/O makes monitoring and maintaining your network an easy and centralized process. ENCOM's proven wireless hardware solutions coupled with unparalleled management and diagnostic software (included free of charge with all units) provide the fast and reliable networks that enterprises and municipalities all over North America have come to expect.

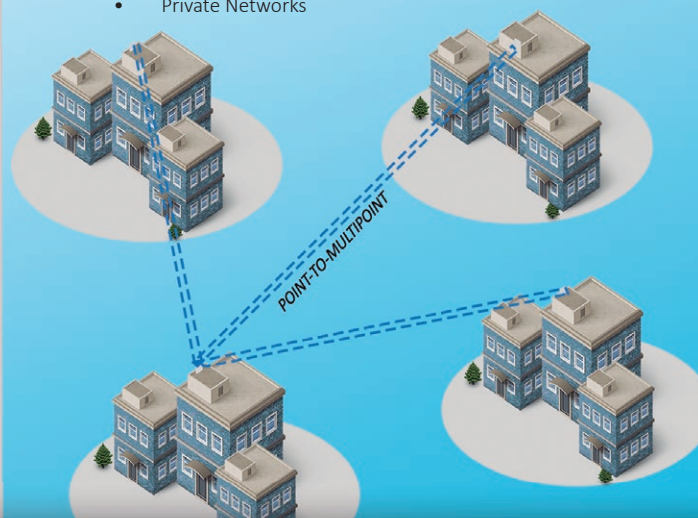

PHYSICAL SPECIFICATIONS:		E-LITE 2.4 GHz 2.412-2.462 GHz BROADBAND SPECIFICATIONS	
	NON-INTEGRATED UNIT	INTEGRATED ANTENNA UNIT	ACCESS POINT CLUSTER
Dimensions:	8.6"x8.6"x3.17"	10.5"x10.5"x4"	12.5"x9.3"x5.8"
Weight:	3 lb.	5 lb.	8 lb.
Environmental:	IP67 Weatherproofing Rating	IP67 Weatherproofing Rating	IP67 Weatherproofing Rating
Antenna Type:	External Panel, Sector, OMNI	19dBi Panel Antenna	External Sector Antenna
Operating Temperature:	-40°C to +80°C @ 95% humidity	-40°C to +80°C @ 95% humidity	-40°C to +85°C @ 95% humidity
Radio Units:	Up to 2	Up to 2	Up to 4
WIRELESS INTERFACE:		NETWORKING FEATURES:	
Frequency Range:	2.412-2.462 GHz	802.11e	WMM and QOS
Peak Transmit Power:	30 dBm (1000 mW)	802.11h	DFS and TPC
Receive Sensitivity:	-96 dBm to -73 dBm	802.1d	Ethernet Bridging
Channel Widths:	5 MHz, 10 MHz, 20 MHz and 40 MHz	802.1p	Traffic Prioritization
Modulations:	OFDM, BPSK, QPSK, 16QAM, 64QAM	802.1q	VLAN
Protocol:	IEEE 802.11a/n, E-max (proprietary)	802.1s	Spanning Tree
Date Rate:	Up to 300Mbps (MCS0-15)	802.1w	Rapid Spanning Tree
MIMO:	2x2	802.3-1998	Ethernet
Topology:	Point-to-Point, Point-to-Multipoint	802.3ab	Gigabit Ethernet
Consumption:	14W (single), 18W (dual)	802.3ac	Extended Frame Size for 802.1q & 802.1p support
IEEE WIRELESS NETWORKING & SECURITY FEATURES:		802.3ad	Link Aggregation/Port Bonding/Port Tracking
<ul style="list-style-type: none">BurstingCompressionDynamic Ack TimeoutTLS EAP MethodPass-through EAP MethodHardware RetriesPreamble ModePeriodic CalibrationDisconnect TimeoutOn-fail RetryCSMA DisableStation Channel Scan ListEMAX proprietary protocol	<ul style="list-style-type: none">802.11i-WPA-PSK802.11i-WPA2-PSK802.11i-WPA-EAP802.11i-WPA2-EAP802.11i-TKIP802.11i-AES-CCM802.11i-802.1x802.11i-RSNRadius AuthenticationMAC Access Control ListFCC 15.247IC RSS-210RoHS Compliant	802.3i	10 Mbps Ethernet
		802.3u	100 Mbps Ethernet and Auto-Negotiation
		802.3x	Full Duplex and Flow Control
		802.1ad	Service Tags
		IGMP	Internet Group Management Protocol v1, v2
ENCOM STRATOS I/O (included free with every unit)			
<ul style="list-style-type: none">Can now access I/O devices from any networkWorks with any broadband network (ENCOM or other)Profile based configurations with SQL databaseReal-Time signal strength and connection quality monitoring with user-defined color coded link statusBuilt-in bandwidth test, network traffic monitoring and spectrum scan toolsAudio antenna alignment toolSystem Wide Ping ToolRadio DiscoveryNetworking Mapping with Auto-Geo Location for GPS enabled unitsUser defined email alerts for maintenance personnel for change in online status, decreased signal levels (dBm), connection quality and changes in data rateStreamlined device programming and ability to manage all devices from a central location			
ADDITIONAL NETWORKING FEATURES:		Distributed by: <div></div>	
<ul style="list-style-type: none">OSPFFTP/TFTPHTTPTelNetSSHSNMP	<ul style="list-style-type: none">SyslogRoutingFirewall/NATNTPVPNDHCP Client/Server		
ORDERING OPTIONS			
<ul style="list-style-type: none">E-Lite 2.4 INT: Single Radio with Integrated Dual Polarity Panel AntennaE-Lite 2.4 INT Dual: Dual Radio with Integrated Dual Polarity Panel Antenna &(2x) External Type-N Female ConnectorsE-Lite 2.4 EXT: Single Radio with (2x) External Type-N Female ConnectorsE-Lite 2.4 EXT Dual: Dual Radio with (4x) External Type-N Female ConnectorsE-Lite HV option: 802.3 af/at capable			
		<div>CANADIAN OFFICE</div> <div>Toll Free: (800) 617-3487</div> <div>Phone: +1 (403) 230-1122</div> <div>#7, 640-42nd Ave NE Calgary</div>	
		<div>USA OFFICE:</div> <div>Toll Free: (800) 617-3487</div> <div>Phone: +1 (972) 885-5170</div> <div>3750 Arapaho Rd. Addison</div>	

*ENCOM Broadband radios require professional installation.
 Specifications subject to change without notice. Visit www.encomwireless.com for updates.
 © 2017 Encom Wireless, Inc. All Rights Reserved.

CANADIAN OFFICE

Toll Free: (800) 617-3487
 Phone: +1 (403) 230-1122
 #7, 640-42nd Ave NE Calgary
 Alberta T2E 7J9
 Canada

USA OFFICE:

Toll Free: (800) 617-3487
 Phone: +1 (972) 885-5170
 3750 Arapaho Rd, Addison
 Texas 75001
 USA

Email: sales@encomwireless.com